


## Dosing is based on pool size with no probes to clean or calibrate for simple management and reliability.

- ✓ Integrates with the NKD-R and NKD-C Freshwater Systems
- ✓ Plug and play
- ✓ Adjustable running and priming timers
- ✓ High quality peristaltic pump motor
- ✓ Superior chemical resistance

- ✓ Probe Free doses acid based on size of the swimming pool
- ✓ PVC rollers ensuring low wear and tear
- ✓ Quality squeeze tube Tygon® MF Norprene®
- ✓ IP34 Rated
- ✓ 12 months warranty

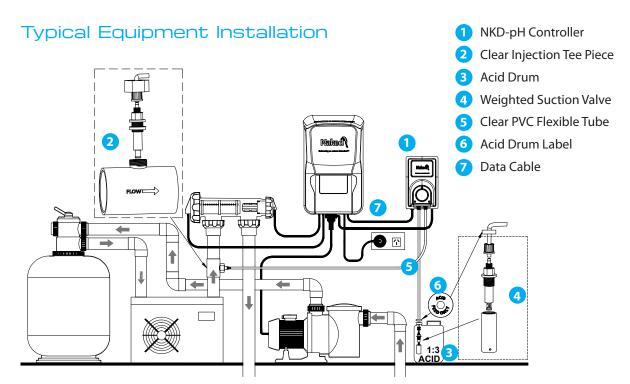

Specifications	
Volts Input (Vac)	220-245
Amps Input - Max. (Aac)	1.00
Total Power Consumption (W)	13W Motor - 20W Total
Frequency (Hz)	50
pH Controller Dimensions (mm)	135W x 225H x 123D
Output Controlled by Sanitiser (LPH)	0-1.0
Rated Pressure (kPa)	350
Squeeze Tube	Tygon® Norprene® (Commercial spec)
Motor Speed (RPM)	10
Non-Return Injector Valve	PVC with viton sleeve
Tubing	6m x 6mm Clear PVC Flexible Tube
Roller Block	Heavy-duty PVC
Power Cord	Approved piggy-back type
Water Connection	40/50mm
Water Flow Rate (L/min)	80-650
IP Rating	34
Net Weight (kg)	2.5



